



The TUBEX Shrubshelter range is a strong, wider diameter treeshelter, providing the full range of benefits of the TUBEX Standard Treeshelter, but designed to accommodate larger and multi-stemmed planting stock.

TUBEX Shrubshelters will give improved survival rates by protecting plants from hares, rabbits and voles and are mainly used for landscaping projects with mixed planting stock. The speedy removal of shelters from plants at the end of the establishment period is often a requirement for landscaping projects, and the TUBEX Shrubshelter is quick and easy to remove - unlike spiral or net products which can become embedded in the branches and bark of growing shrubs.

Hints and Tips

TUBEX Shrubshelters need to be well anchored, so use a quality square stake, with soil depth of at least 1'. For larger stock consider the TUBEX Shrubshelter Plus. Using the shelter's natural strength, ensure that it is pushed into the ground to remove gaps at the base.

Visit www.tubexusa.com for advice on choice and use of TUBEX products.

Quick specifications

- | | | | |
|-----------|-------------|-------------|--------------|
| • Heights | 24" & 30" | • Diameters | 5.1" to 6.3" |
| • Nest | 4 tubes | • Bundles | 28 tubes |
| • Color | Light Green | • Ties | 2 x 10" |



Tel: 615 847 7039

Aberaman, Aberdare, CF44 6DA
South Wales, UK

e.mail: info@tubexusa.com

www.tubexusa.com



TUBEX
Advancing growth



TUBEX SHRUBSHELTERS

Data Sheet

TUBEX shrubshelter with twin-wall tubular construction, manufactured from environmentally harmless polypropylene, with anti-abrasion flared rim and prefitted releasable ratchet ties.

Specifications

Material composition

- UV stabilized polypropylene, harmless to the environment
- Two nylon ratchet tie attachments

Standard sizes

- Heights: 24" & 30" (tolerance +0-0.6")
- Diameters: Nested in 4 diameters 5.1", 5.5", 5.9" & 6.3"

Colors

- Specially blended light green

Special Features

- Flared rim to minimise stem abrasion
- Pre-fitted, releasable ratchet ties for ease of installation


Durability

- Durable twin-wall construction for the best possible strength-to-weight ratio
- UV stabilized to provide a minimum estimated lifespan of 5-7 years (can vary beyond this range depending on site conditions)


Applications

- Suitable for large and multi stemmed planting stock and most site conditions.
- Favours landscaping projects with mixed planting stock

Distributor

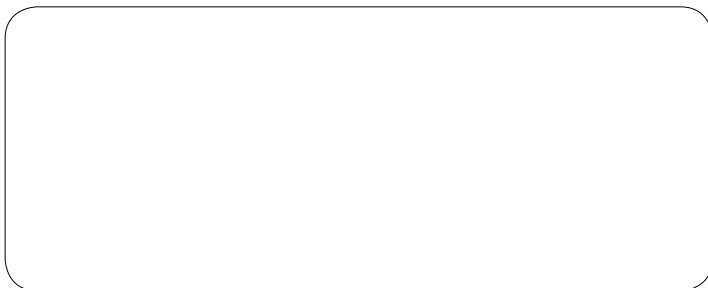

Features



Flared rim to minimize stem abrasion



Twin wall construction for rigidity and best strength to weight ratio



UV stabilized and made from recycled plastic to provide minimum 7 year protection



Pre fitted thumb releasable ties for quick, easy installation and maintenance

Tel: 615 847 7039

Aberaman, Aberdare, CF44 6DA
South Wales, UK

e.mail: info@tubexusa.com

www.tubexusa.com



TUBEX
Advancing growth